


Product Highlights

- Open vent Weight Loaded
- Standard Pressure settings + 4 mbarg to 100 mbarg
- Size range 2" (50 mm) - 12" (300 mm)
- Standard body materials - Carbon steel, Stainless steel
- Standard trim material - Stainless steel
- Diaphragm material - PTFE
- Standard drilled flanges - ANSI / DIN / JIS / Specials
- Lightweight design
- Alternative materials for hazardous applications
- Non standard applications consult factory

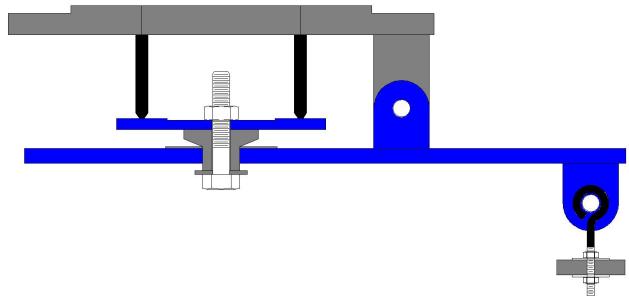

Features

Low cost maintenance

Lightweight design provides easy handling whilst interchangeable components ensure standard parts are easily replaced

Testing / Quality

All products are factory tested and fully certified.

Self Draining

All products are designed so that any condensate drains away from seating areas.

Low leakage

Standard seating design ensures minimum leakage of less than 1 scfh at 90% of set pressure.

Internal Parts

Internal parts are stainless steel as standard. Non standard materials available upon request.

Connections

All valves are supplied with full form flanges to meet individual requirements. Other connections are available upon request.

Non Standard Applications


There are numerous options available for special applications. Exotic materials such as Hastelloy and various plastics can be offered to suit the most hazardous of environments. Special coatings can be applied for extreme service. For low temperature duties, internal parts can be PTFE coated to prevent seizure.

See separate section in catalogue.

* All products are subject to continuous development and subsequently 3B Controls reserve the right to change specifications outlined in this catalogue without notification.

B800 Series Liquid Overfill Relief Valves

 3B Controls

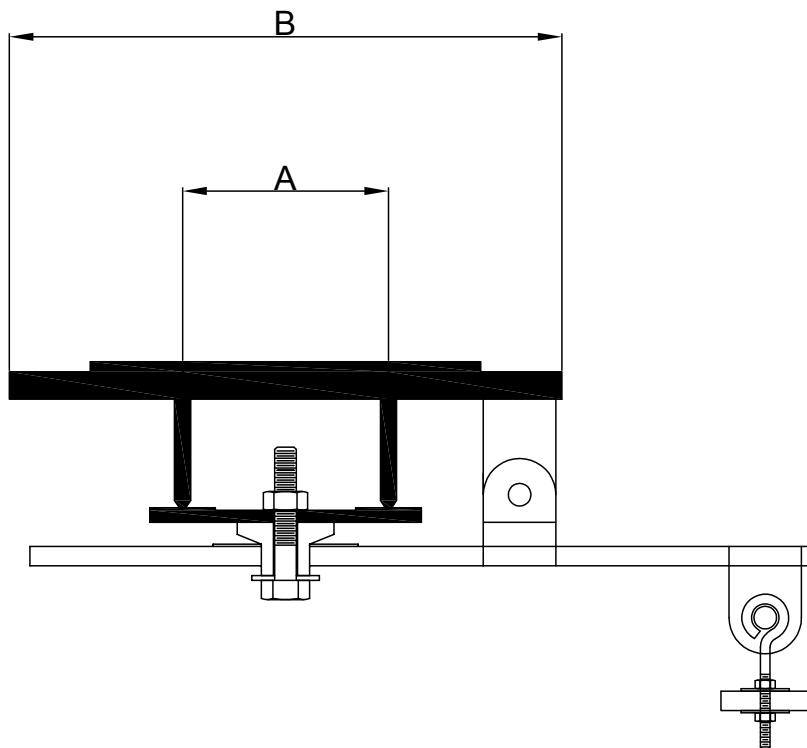

Dimensions

NOM SIZE	A	B
80 (3")	76	190
100 (4")	102	229
150 (6")	152	279
200 (8")	203	343